





MIGHTY-RITE® SPLIT BUSHINGS

PRODUCT BROCHURE

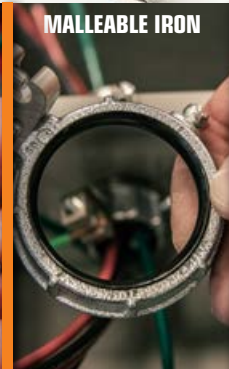

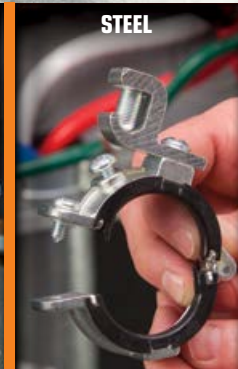


MIGHTY-RITE® SPLIT GROUNDING BUSHINGS

THE RIGHT SOLUTION BEFORE OR AFTER YOU PULL WIRE

Finally. A Listed bushing that can be installed with the wires terminated. Its another contractor innovation from Bridgeport.

- Can be installed after the wire pull, without expensive rework
- Adjustable tin-plated lay in lug for copper or aluminum grounding wire
- Pulling larger conductor wire is easier when you can install grounding bushings after the pull
- Hinged low profile design adjusts and aligns for easy access
- Zinc alloy SGB series is suitable for outdoor exposed use
- Available in Zinc Alloy and Steel construction
- cULus listed

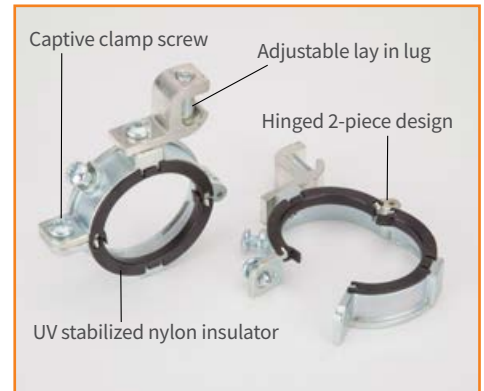

MIGHTY-RITE SPLIT GROUNDING BUSHINGS

Mighty-Rite's hinged design and adjustable grounding lug deliver installation flexibility on every job. Zinc Die Cast versions are provided with stainless steel hardware and UV Stabilized Insulators. Perfect for Solar Applications! Patented.

ZINC DIE CAST / STAINLESS STEEL HARDWARE

PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
SGB-382CL	14	4	3/4"	20	250
SGB-383CL	14	4	1"	25	250
SGB-38414	14	4	1 1/4"	20	200
SGB-384CL	14	1/0	1 1/4"	20	200
SGB-38514	14	4	1 1/2"	20	200
SGB-385CL	14	1/0	1 1/2"	20	200
SGB-38614	14	4	2"	1	100
SGB-386CL	14	1/0	2"	1	100
SGB-38740	6	250 MCM	2 1/2"	1	25
SGB-387CL	14	1/0	2 1/2"	1	25
SGB-38840	6	250 MCM	3"	1	25
SGB-388CL	14	1/0	3"	1	25
SGB-38940	6	250 MCM	3 1/2"	1	25
SGB-389CL	6	3/0	3 1/2"	1	25
SGB-39040	6	250 MCM	4"	1	20
SGB-390CL	6	3/0	4"	1	20

UV STABILIZED NYLON INSULATOR

PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
SGBS-381CL	14	4	1/2"	25	100
SGBS-382CL	14	4	3/4"	25	250
SGBS-383CL	14	4	1"	25	250
SGBS-38414	14	4	1 1/4"	20	200
SGBS-384CL	14	1/0	1 1/4"	20	200
SGBS-38514	14	4	1 1/2"	20	200
SGBS-385CL	14	1/0	1 1/2"	20	200
SGBS-38614	14	4	2"	1	100
SGBS-386CL	14	1/0	2"	1	100
SGBS-38740	6	250 MCM	2 1/2"	1	25
SGBS-387CL	14	1/0	2 1/2"	1	25
SGBS-38840	6	250 MCM	3"	1	25
SGBS-388CL	14	1/0	3"	1	25
SGBS-38940	6	250 MCM	3 1/2"	1	25
SGBS-389CL	6	3/0	3 1/2"	1	25
SGBS-39040	6	250 MCM	4"	1	20
SGBS-390CL	6	3/0	4"	1	20
SGBS-39050	350	500 MCM	4"	1	20
SGBS-39150	350	500 MCM	5"	1	20
SGBS-39250	350	500 MCM	6"	1	20

ZINC DIE CAST / STAINLESS STEEL HARDWARE

PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
SGBTL-383CL	14	4	1"	15	150
SGBTL-384CL	14	1/0	1 1/4"	10	100
SGBTL-385CL	14	1/0	1 1/2"	10	100
SGBTL-386CL	14	1/0	2"	10	100
SGBTL-387CL	6	250 MCM	2 1/2"	-	25
SGBTL-388CL	6	250 MCM	3"	-	25
SGBTL-389CL	6	250 MCM	3 1/2"	-	25
SGBTL-386CL	14	250 MCM	4"	-	20

MIGHTY-RITE THREADLESS SPLIT GROUNDING BUSHINGS

Install your bushings on threadless EMT or Rigid conduit before or after pulling wire and making connections. Mighty-Rite's innovative hinged and split design adjusts and aligns easier — even in tight spots and allows shorter facility downtime when upgrading existing power and data systems.

150°C Captive Nylon Insulator. Patented.



BUSHINGS ENGINEERED WITH THE BRIDGEPORT DIFFERENCE



INSULATED GROUNDING BUSHINGS

Used to protect wires and ground metallic conduit to enclosure or cabinet. Aluminum alloy lug provided for bonding jumper. Plastic bushing prevents damage to wire insulation. Zinc Die Cast versions provided with stainless steel hardware and UV stabilized insulators for outdoor exposed locations .

UL File No. E20412

MALLEABLE IRON / NYLON INSULATOR - 150°C					
PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
381	14	4	1/2"	50	500
382	14	4	3/4"	50	500
383	14	4	1"	25	250
384	14	1/0	1 1/4"	20	200
384-14	14	4	1 1/4"	20	200
385	14	1/0	1 1/2"	20	200
385-14	14	4	1 1/2"	20	200
386	14	1/0	2"	10	100
386-14	14	4	2"	10	100
387	14	1/0	2 1/2"	-	25
387-40	6	250 MCM	2 1/2"	-	25
388	14	1/0	3"	-	25
388-40	6	250 MCM	3"	-	25
389	14	1/0	3 1/2"	-	25
389-40	6	250 MCM	3 1/2"	-	25
390	14	1/0	4"	-	20
390-40	6	250 MCM	4"	-	20
391	6	250 MCM	5"	-	5
392	6	250 MCM	6"	-	5

ZINC DIE CAST / STAINLESS STEEL HARDWARE / UV STABILIZED NYLON INSULATOR					
PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
381-DC	14	4	1/2"	50	500
382-DC	14	4	3/4"	50	500
383-DC	14	4	1"	25	250
384-DC	14	1/0	1 1/4"	20	200
384-DC14	14	4	1 1/4"	20	200
385-DC	14	1/0	1 1/2"	20	200
385-DC14	14	4	1 1/2"	20	200
386-DC	14	1/0	2"	10	100
386-DC14	14	4	2"	10	100
387-DC	14	1/0	2 1/2"	-	25
387-DC40	6	250 MCM	2 1/2"	-	25
388-DC	14	1/0	3"	-	25
388-DC40	6	250 MCM	3"	-	25
389-DC	14	1/0	3 1/2"	-	25
389-DC40	6	250 MCM	3 1/2"	-	25
390-DC	14	1/0	4"	-	20
390-DC40	6	250 MCM	4"	-	20



MIGHTY-RITE NONMETALLIC SPLIT BUSHINGS

Patented split design allows insulating bushing to be installed with conductors terminated. Used to protect and insulate wires from ends of threaded conduit and connectors when assembled to a box or enclosure. Rated 105°C.

UL File No. E9391

NYLON INSULATOR - 150°C			
PART #	K.O. SIZE	UNIT QTY	STD PKG QTY
SB-383NM	1"	25	250
SB-384NM	1 1/4"	20	200
SB-385NM	1 1/2"	20	200
SB-386NM	2"	10	100
SB-387NM	2 1/2"	—	25
SB-388NM	3"	—	25
SB-389NM	3 1/2"	—	25
SB-390NM	4"	—	20



THREADLESS INSULATED GROUNDING BUSHINGS

Used to protect, ground and insulate wires during the pull and while in operation on the end of Rigid or Intermediate metal conduit and fittings. Tin plated Aluminum lug is suitable for copper or aluminum bonding jumper. Plastic insulator protects wires during the pull and while in operation.

UL File No. E20412

MALLEABLE IRON / ALUMINUM ALLOY LUG					
PART #	GROUNDING LUG WIRE CAPACITY		TRADE SIZE	UNIT QTY	STD PKG QTY
	SOLID STRAND				
	MIN	MAX			
TL-381	14	4	1/2"	50	500
TL-382	14	4	3/4"	50	500
TL-383	14	4	1"	25	250
TL-384	8	1/0	1 1/4"	20	200
TL-38414	14	4	1 1/4"	20	200
TL-385	8	1/0	1 1/2"	20	200
TL-38514	14	4	1 1/2"	20	200
TL-386	8	1/0	2"	10	100
TL-38614	14	4	2"	10	100
TL-387	8	1/0	2 1/2"	—	25
TL-38740	6	250 MCM	2 1/2"	—	25
TL-388	8	1/0	3"	—	25
TL-38840	6	250 MCM	3"	—	25
TL-389	6	3/0	3 1/2"	—	25
TL-38940	6	250 MCM	3 1/2"	—	25
TL-390	6	3/0	4"	—	20
TL-39040	6	250 MCM	4"	—	20



INSULATING BUSHINGS

Used to protect wires during the pull inside threaded rigid and intermediate conduits, connectors and adapters entering a box or enclosure. Rounded edge provides less friction.

 File No. E9391: 321 thru 332

 File No. E11259: 321-B thru 330-B

 File No. LR39354

POLYPROPYLENE - 105°C			
PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
321	1/2"	100	1000
322	3/4"	100	1000
323	1"	50	500
324	1 1/4"	—	100
325	1 1/2"	—	100
326	2"	—	50
327	2 1/2"	—	25
328	3"	—	25
329	3 1/2"	—	25
330	4"	—	20
331	5"	—	5
332	6"	—	5

NYLON - 105°C			
PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
321-B	1/2"	100	1000
322-B	3/4"	100	1000
323-B	1"	50	500
324-B	1 1/4"	—	100
325-B	1 1/2"	—	100
326-B	2"	—	50
327-B	2 1/2"	—	25
328-B	3"	—	25
329-B	3 1/2"	—	25
330-B	4"	—	20
331	5"	—	5
332	6"	—	5



INSULATED BUSHINGS

Used to protect wires during the pull inside threaded rigid and intermediate metal conduits and connectors entering a box or enclosure. Plastic insulator with rounded edge provides less friction. Rated 150oC except catalog numbers 371 and 372 which are rated 105°C.

 File No. E9391

MALLEABLE IRON / NYLON INSULATOR			
PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
361	1/2"	100	1000
362	3/4"	100	1000
363	1"	50	500
364	1 1/4"	10	100
365	1 1/2"	10	100
366	2"	10	100
367	2 1/2"	2	10
368	3"	2	10
369	3 1/2"	—	5
370	4"	—	5
371	5"	—	5
372	6"	—	5

ZINC DIE CAST / NYLON INSULATOR			
PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
361-DC	1/2"	100	1000
362-DC	3/4"	100	1000
363-DC	1"	50	500
364-DC	1 1/4"	10	100
365-DC	1 1/2"	10	100
366-DC	2"	10	100
367-DC	2 1/2"	2	10
368-DC	3"	2	10
369-DC	3 1/2"	—	5
370-DC	4"	—	5



PULL CAPS

Used For Rigid, IMC and PVC Rigid Conduit, seals off conduit during conduit pours.



BUSHING PENNIES

Used on top edge of conduit and under threaded bushing to prevent foreign matter from entering the conduit.



KNOCKOUT INSULATED BUSHINGS

Converts metallic box rough edged holes to smooth insulated holes for protection of electrical, voice, data and video cables.



File No. LR24719



File No. E240912 (9791 thru 9796)



STUD BUSHINGS

Protects wire insulation from abrasion in metal studs. Bushing allows smooth cable pulling. Used for all pre-punched shaped holes.



File No. E11259



INSULATING BUSHINGS

EMT bushing insulates telephone, computer, video and other low voltage wiring from sharp edges of EMT. Complies with NEC Article 300-15(c).

POLYPROPYLENE

PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
341	1/2"	100	1000
342	3/4"	100	1000
343	1"	100	1000
344	1 1/4"	50	250
345	1 1/2"	25	100
346	2"	25	100

GALVANIZED STEEL


PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
1661	1/2"	500	1000
1662	3/4"	250	500
1663	1"	100	200
1664	1 1/4"	50	100
1665	1 1/2"	50	100
1666	2"	50	100
1667	2 1/2"	50	100
1668	3"	50	100
1669	3 1/2"	25	100
1670	4"	25	100
1671	5"	25	100

NYLON - 105°C

PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
9791	1/2"	.875"	100
9792	3/4"	1.109"	100
9793	1"	1.375"	50
9794	1 1/4"	1.734"	50
9795	1 1/2"	1.984"	25
9796	2"	2.469"	20
9797	2 1/2"	2.969"	20

POLYPROPYLENE

PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
9882	-	50	500



POLYETHYLENE - 90°C

PART #	TRADE SIZE	UNIT QTY	STD PKG QTY
TWB-51	1/2"	100	1000
TWB-52	3/4"	50	500
TWB-53	1"	25	250
TWB-54	1 1/4"	25	250
TWB-55	1 1/2"	-	100
TWB-56	2"	-	50
TWB-57	2 1/2"	-	25
TWB-58	3"	-	25
TWB-59	3 1/2"	-	25
TWB-60	4"	-	25



**To order, contact your
local sales representative.**

nsiindustries.com/bridgeport

800.321.5847



©2026 NSI INDUSTRIES
800.321.5847
nsiindustries.com

BPT_Bush_CCF_ProdBro | 0926

A Hubbell brand

