
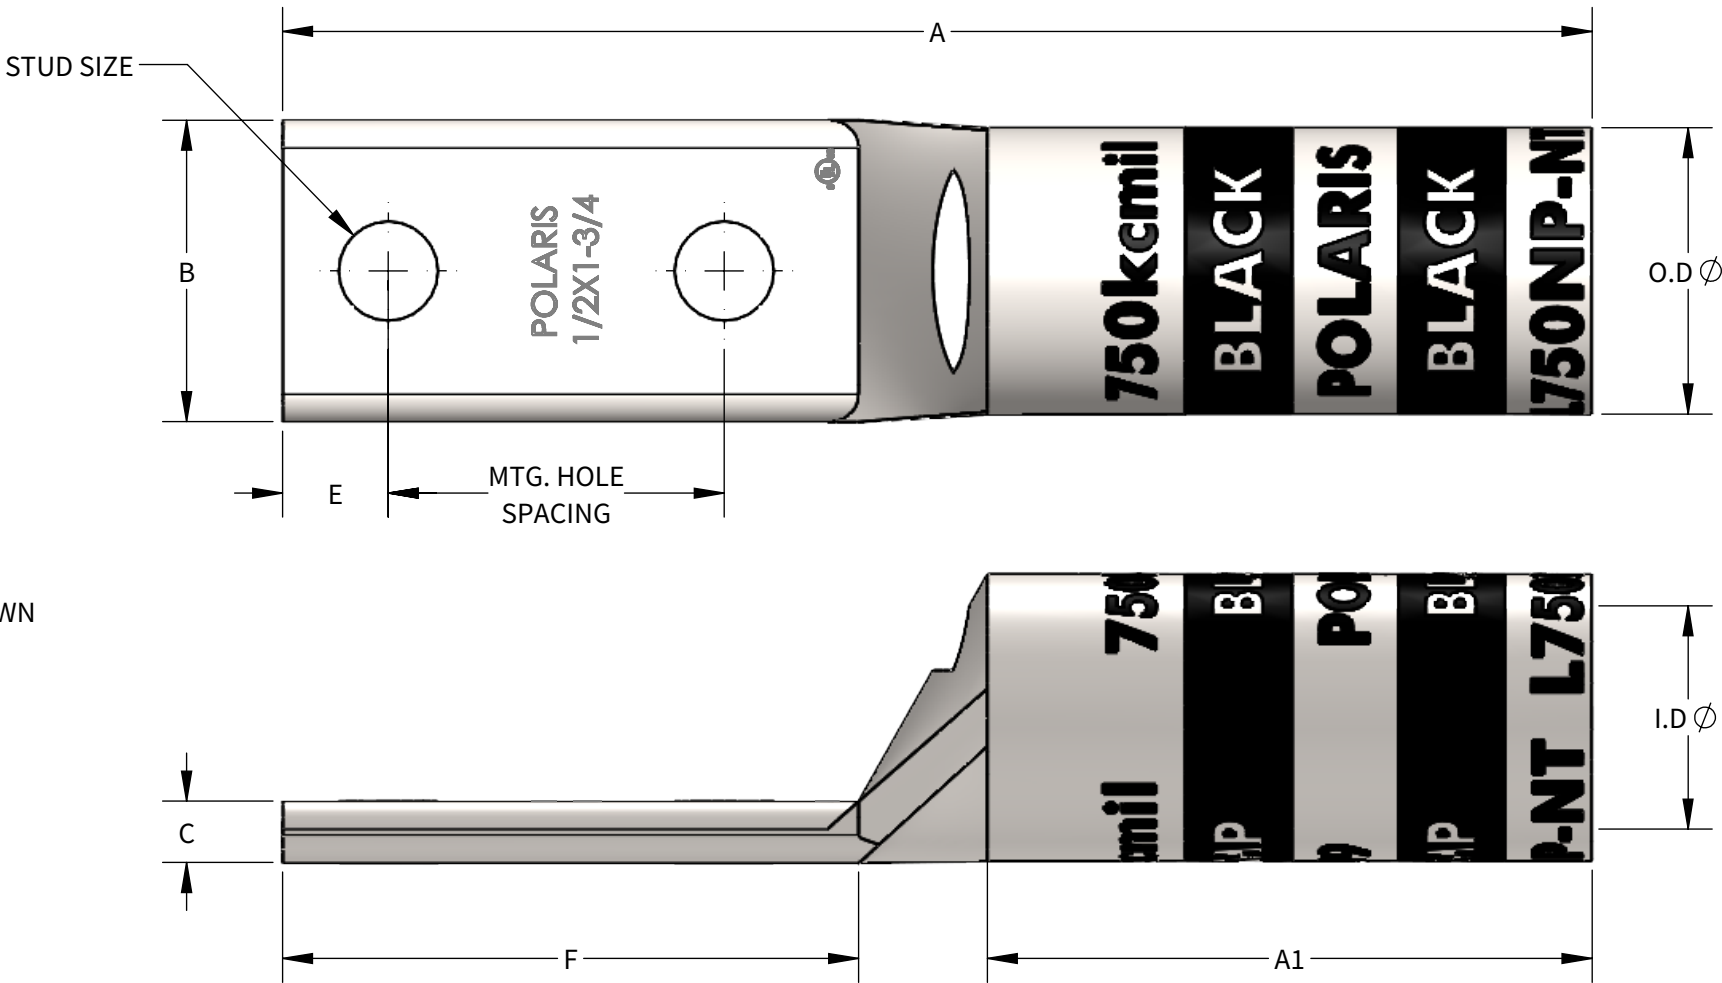


- FEATURES:**
- 1. Material: Tin Plated CU
 - 2. UL listed for U.S. & Canada.
 - 3. Wire connector rated for 35Kv max.
 - 4. Rated for compressed, concentric, compact and flex copper conductor.

LNP-NT Series

POLARIS®

PROGRAM:	SOLIDWORKS
UPDATED:	3/13/2026
SALES REV:	B
SIZE:	B (11x17)

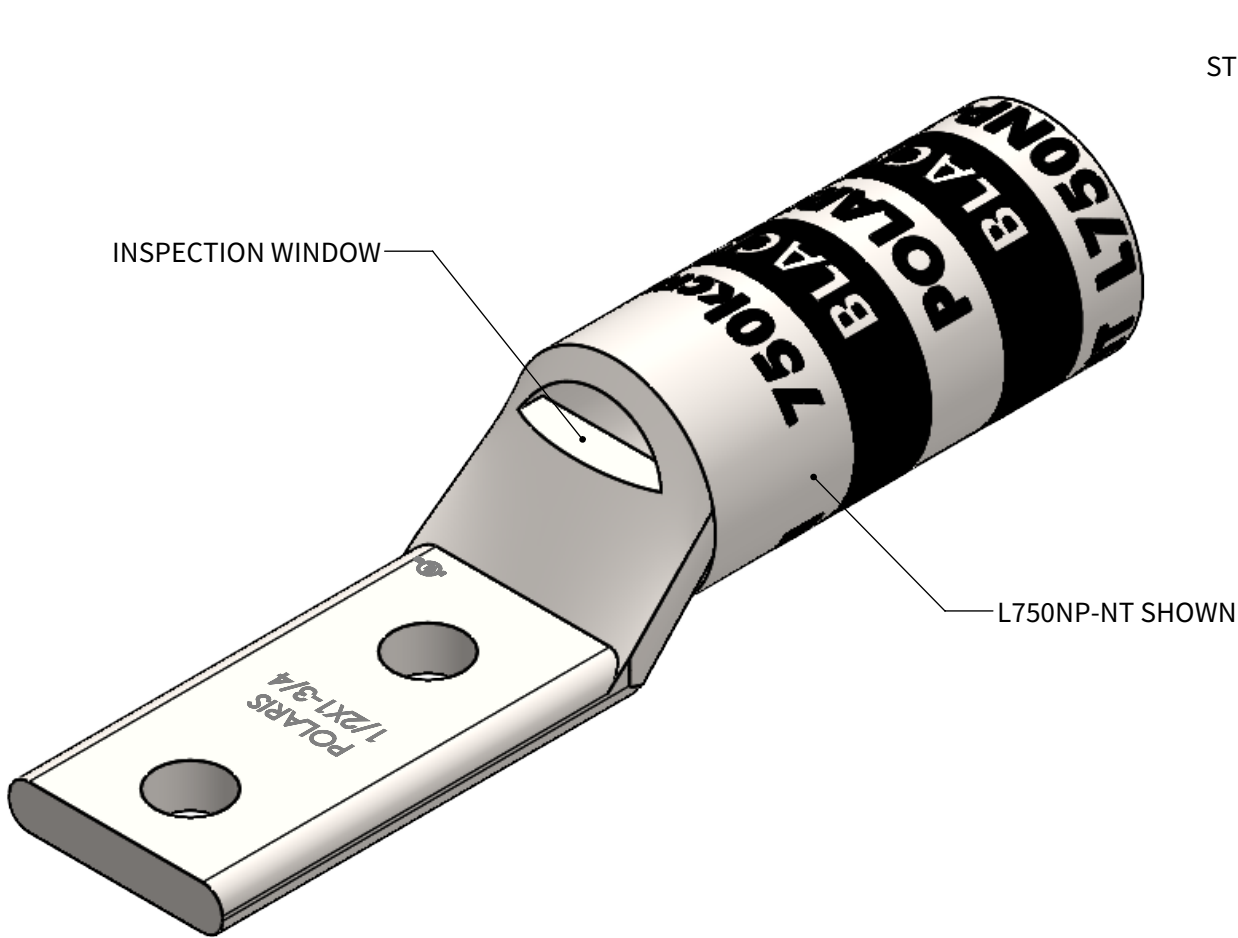

* SEE INSTALLATION INSTRUCTIONS FOR TOOL AND DIE COMPATIBILITY

Part Number	Building Code Wire Size	Flex Wire Size*	Expanded Wire Range*	Stud Size	Mtg. Hole Spacing (in.)	Die Color	I.D.	O.D.	A	A1	B	C	E	F
L350NP-NT	350kcmil	250/262kcmil	350 -3/0	1/2	1 3/4	RED	0.70	0.87	5.36	1.97	0.88	0.17	0.55	3.00
L400NP-NT	400kcmil	-	400 -4/0	1/2	1 3/4	BLUE	0.76	0.95	5.40	1.97	0.96	0.18	0.55	3.00
L500NP-NT	500kcmil	350/373kcmil	500 -250	1/2	1 3/4	BROWN	0.83	1.06	5.72	2.24	0.96	0.22	0.55	3.00
L600NP-NT	600kcmil	444kcmil	600 -250	1/2	1 3/4	GREEN	0.91	1.18	5.77	2.24	1.12	0.25	0.55	3.00
L700NP-NT	700kcmil	500/535kcmil	700 -500	1/2	1 3/4	PINK	0.99	1.25	6.20	2.64	1.12	0.27	0.55	3.00
L750NP-NT	750kcmil	600/646kcmil	750 -500	1/2	1 3/4	BLACK	1.03	1.30	6.23	2.64	1.12	0.27	0.55	3.00
L1000NP-NT	1000kcmil	777kcmil	1000 -750	1/2	1 3/4	WHITE	1.16	1.49	6.82	3.15	1.57	0.32	0.55	3.00

